


NOTE:

1. All surfaces are AR Coated
2. IR Filter SPEC
 - Tavg >= 92% @ 440-630nm
 - Tmin >= 88% @ 440-630nm
 - T = 50% @ 650-670nm
 - T < 3% @ 710-1100nm
3. Material applied tally with ROHS standard

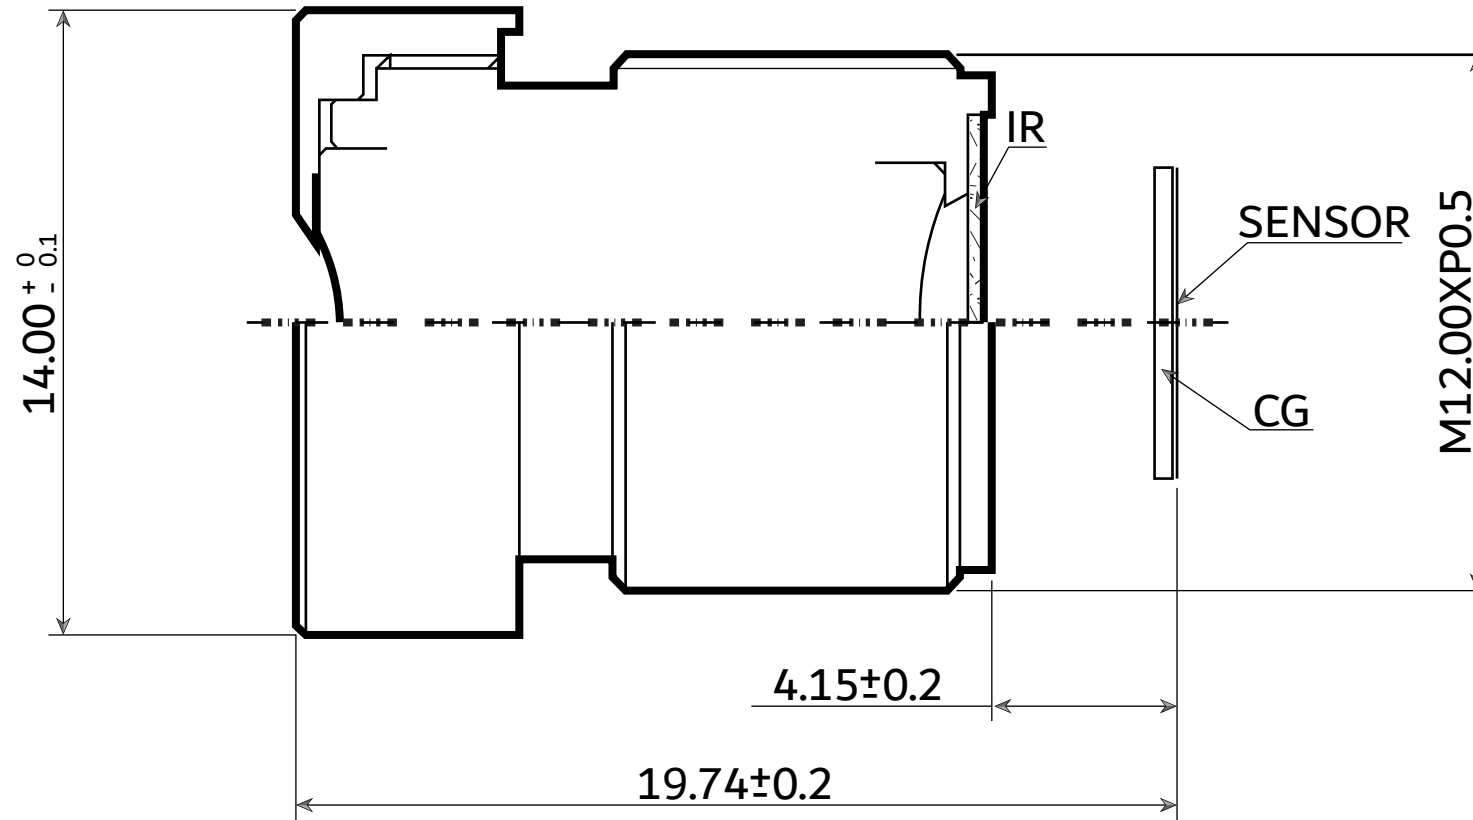

Optical Format	SC1245(1/4")	
Total Length (mm)	19.74	
Chief Ray Angle	<11°	
F/NO.	2.3	
EFL (mm)	8.1	
Mechanical BFL (mm)	4.15	
F.O.V	Horizontal	27.8°
	Vertical	15.6°
	Diagonal	32°
Scale	5:1	
Distortion	<-11%	
Relative illumination	>73%	
AR Coating	YES	
Construction	4G+1 IR	
Mount	M12*P0.5	

Part Number
20-1122-01

Size	Units	Weight
	mm	5g

Remark	Tolerances (mm)	Date	Revision
X.0		2020-09-09	v0.1a
X.00			
X.000			
Angle			

