

ISM-IMX335

MIPI SENSOR MODULE

The iENSO MIPI sensor module ISM-IMX335 is superbly adaptable to iENSO's embedded ecosystem of SOMs, camera modules, and wireless connectivity modules.

The ISM-IMX335 uses SONY's IMX335 sensor with STARVIS technology. STARVIS technology applies a back-illuminated pixel structure, which is more efficient in collecting light to reach high sensitivity and realize high quality in the visible-light and near-infrared light regions.


The SONY IMX335 sensor features a type 1/2.8" color CMOS with 5.14M effective pixel to achieve 2592 x 1944 resolution with digital overlap HDR technology and it's suitable for various lenses.

APPLICATIONS

- Specialty Surveillance
- Precision Farming
- After-market automotive
- Trial and Hunting cameras
- IoT & Embedded vision


KEY SPECIFICATIONS

- Framerate: 60 fps 2592 x 1944 resolution at 10-bit over MIPI CSI-2 10-bit interface.
- Pixel details: 2 μm , 2592 x 1944 array (4:3), Exmor R / STARVIS BSI, DOL-HDR, rolling shutter.
- Package/Environmental: 88 pin CSP BGA, -10°C to 60°C sensor ambient operating temperature.




Width: 26mm
Height: 26mm

SPECTRAL RESPONSE

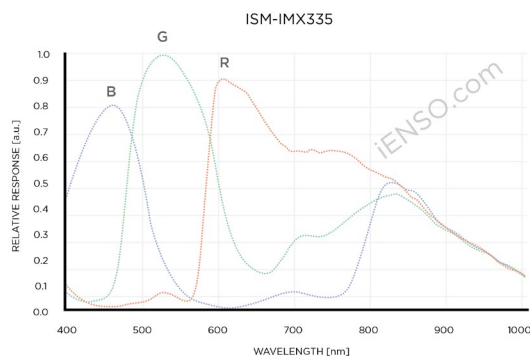

CHIEF RAY ANGLE

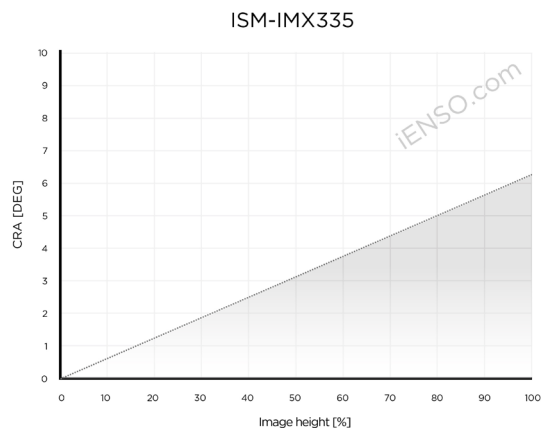

iENSO.COM

iENSO Global Headquarters
20 Mural St. Unit 7
Richmond Hill (ON) L4B 1K3, Canada
(905) 763-6938 | mail@iENSO.com

Manufacturing Operations China
News Building
1002 Shennan Road, Room 1603
Shenzhen, Guangdong, P. R. China

Maker	ON Semi	Silicon Optonics		ON Semi	Sony	Sony	OmniVision	Sony
Sensor	AR0144	JX-F22	JX-K02	AR0521	IMX335	IMX326	OV8865	IMX317
Megapixels (MP)	1.0	2.1	4.1	5.0	5.14	6.8	8.0	8.5
Frame Rate (fps)	60	60	60	60	60	30	30	60
Optical Format (inch)	1/4	1/2.7	1/2.7	1/2.5	1/2.8	1/2.9	1/3.2	1/2.5
Pixel size (µm)	3.0	3.0	2.2	2.2	2	1.62	1.4	1.62
Benefits	<ul style="list-style-type: none"> • HDR • Low Light • Near IR enhanced 	<ul style="list-style-type: none"> • HDR • Low light 	<ul style="list-style-type: none"> • On-chip ISP • HDR • Low light 	<ul style="list-style-type: none"> • HDR • BSI • Low light 	<ul style="list-style-type: none"> • HDR • Low light • BSI • Near IR enhanced 	<ul style="list-style-type: none"> • BSI • Low light • HDR • Near IR enhanced 	<ul style="list-style-type: none"> • BSI 	<ul style="list-style-type: none"> • HDR • BSI

THE RIGHT EMBEDDED VISION SYSTEM FOR YOUR APPLICATION

CONSISTENT QUALITY: From six-axis lens alignment to consistently accurate color quality, to AI and ubiquitous connectivity, we guarantee that every iENSO embedded vision system will perform to spec.

SECURE SUPPLY: With iENSO engineers on the floor in all of our manufacturing partner facilities, we guarantee the quality and quantity of supply you need to make your application a success.

COMPELLING ECONOMICS: With our years of experience in the design and development of industrial, machine and consumer vision technologies, we can provide a cost-effective, no compromise embedded vision solution for your application.

ABOUT iENSO

Established in 2003, iENSO provides imaging and wireless solutions that are helping global brands take their products to the next level in the age of embedded systems and AI platforms. iENSO accelerates the deployment of innovative imaging and wireless products in a wide range of verticals such as IoT, home automation, automotive,

drones, professional entertainment, robotics, remote surveillance and security. With offices in Canada and China, iENSO has perfected the engineering ecosystems that exist between initial design and high-volume manufacturing.



iENSO Global Headquarters

20 Mural St. Unit 7
Richmond Hill (ON) L4B 1K3, Canada
(905) 763-6938 | mail@iENSO.com

Manufacturing Operations China

News Building
1002 Shennan Road, Room 1603
Shenzhen, Guangdong, P. R. China